



<b>Description</b>	: Lithium Battery, 2/3A Size
<b>Chemical System</b>	: Lithium Manganese Dioxide
<b>Nominal Voltage</b>	: 3.0 Volts
<b>Nominal Capacity</b>	: 1400mAh (Discharge at 10mA to 2.0V at 23°C)
<b>Typical Capacity</b>	: 1450mAh (Discharge at 10mA to 2.0V at 23°C)
<b>Dimensions</b>	: Ø17 mm x 34.5 mm
<b>Terminals</b>	: Flat, Recessed Negative Terminal
<b>Jacket</b>	: PVC Resin Label
<b>Average Weight</b>	: App. 16g
<b>Application</b>	: Cameras, flashlights, memory back-up, medical equipment, meters (gas/electric/water), photo flash, electronic guns, etc.
<b>Operating Temperature</b>	: -40°C to 60°C





Model No.: **GPCR123A**



Unit : mm

### Cross References:

Eveready	Duracell
EL 123AP	DL 123A

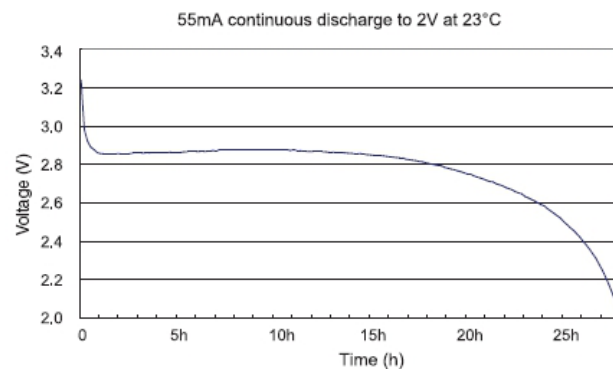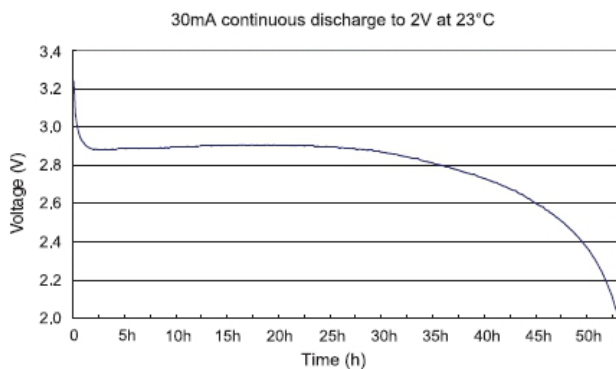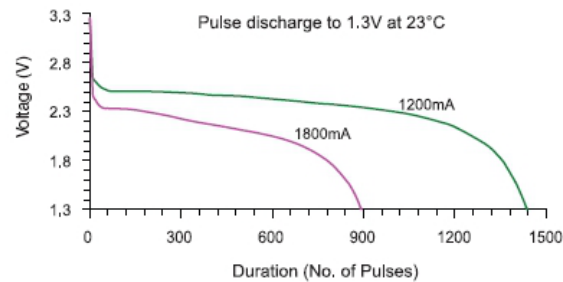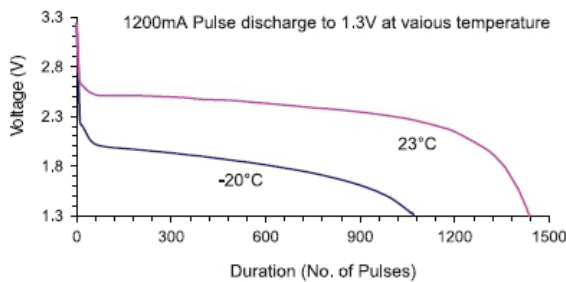

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

[www.gpbatteries.com](http://www.gpbatteries.com)

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.  
Copyright© GPI International Ltd. - All rights reserved

 Member  
Gold Peak Group

08120112063